
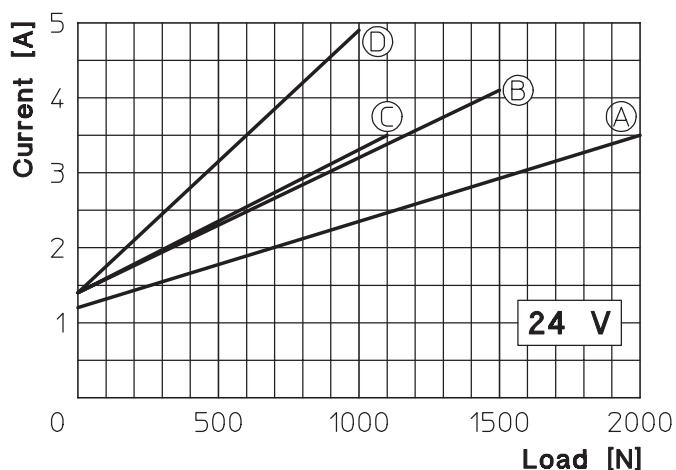


STROKE CODE	STROKE [mm]	ACTUATOR LENGTH		WEIGHT [kg]
		Lc [mm]	La [mm]	
C100	100	243	343	2
C150	150	293	443	2.25
C200	200	343	543	2.5
C300	300	443	743	2.75

PERFORMANCE WITH DC MOTOR 24 V

Max. permissible duty cycle: 15% over 10 min. at environment temperature $(-10 \div 40)^\circ\text{C}$

LINEAR SPEED [mm/s]		MAX. LOAD [N]	RATIO	MAX. CURRENT at 24 V [A]	CURVE
WITHOUT LOAD	WITH MAX. LOAD				
6	5	2000	RL1	3.5	A
12	10	1500	RN1	4.1	B
16	13	1100	RL2	3.5	C
32	24	1000	RN2	4.9	D

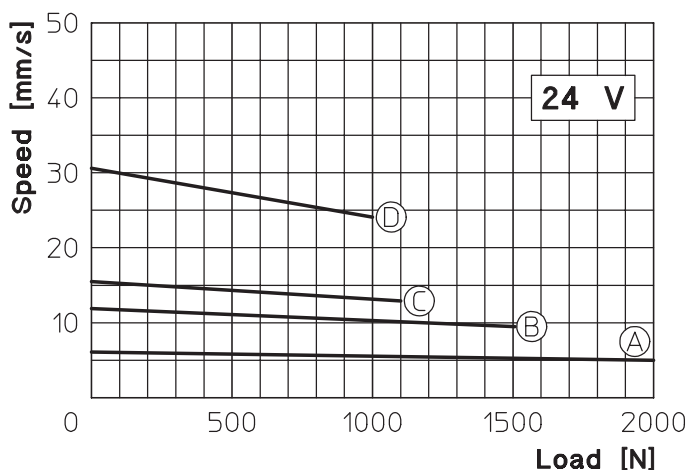

Performances with 12 V DC motors: at same load, speed 20% less and current two times