
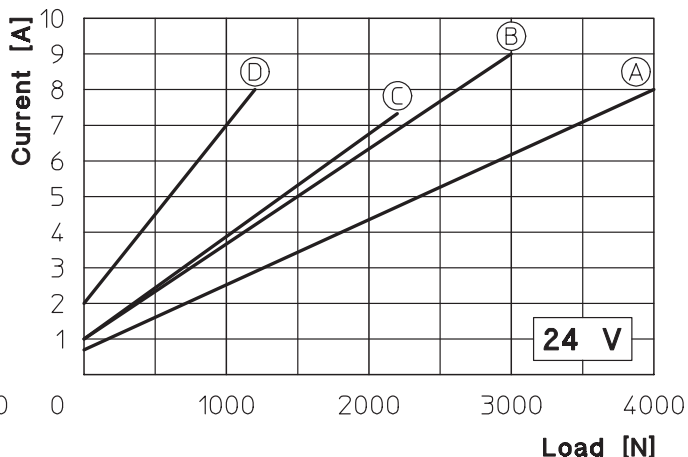


STROKE CODE	ACTUATOR WITHOUT FCM			ACTUATOR WITH FCM			Lb [mm]	WEIGHT [kg]
	STROKE [mm]	Lc [mm]	La [mm]	STROKE [mm]	Lc [mm]	La [mm]		
C100	100	266	366	73	293	366	239	3.5
C200	200	366	566	173	393	566	339	3.8
C300	300	466	766	273	493	766	439	4.1
C400	400	566	966	373	593	966	539	4.4
C500	500	666	1166	473	693	1166	639	4.7

**PERFORMANCE WITH DC MOTOR 24 V**

Max. permissible duty cycle: 15% over 10 min. at environment temperature (-10 ÷ 40)°C

LINEAR SPEED [mm/s]		MAX. LOAD [N]	RATIO	MAX. CURRENT at 24 V [A]	CURVE
WITHOUT LOAD	WITH MAX. LOAD				
8	5	4000	RXL2	8	A
16	7	3000	RL2	9	B
32	16	2200	RN2	7.4	C
64	37	1100	RV2	8	D

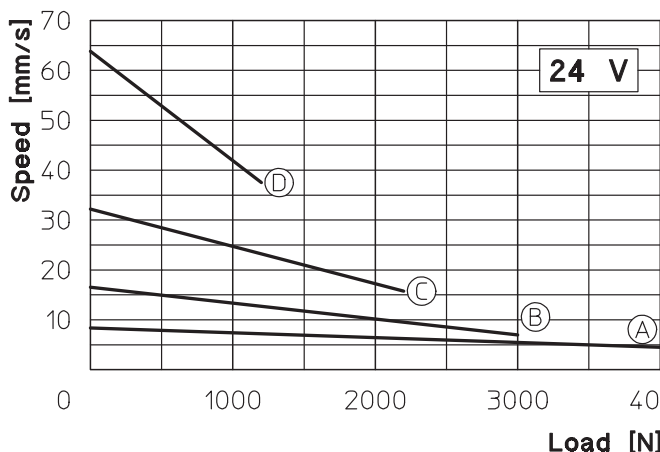

Performances with 12 V DC motors: at same load, speed 20% less and current two times